






Download, Extract and open the UV-5X Firmware Update Folder


Name	Type	Co
 UV-5X Programming Software	File folder	
 UV-5X_Firmware Update	File folder	

Open the BF\_Download APP

Name	Type	Comp
 Code	File folder	
 BF_DownLoad.exe	Application	

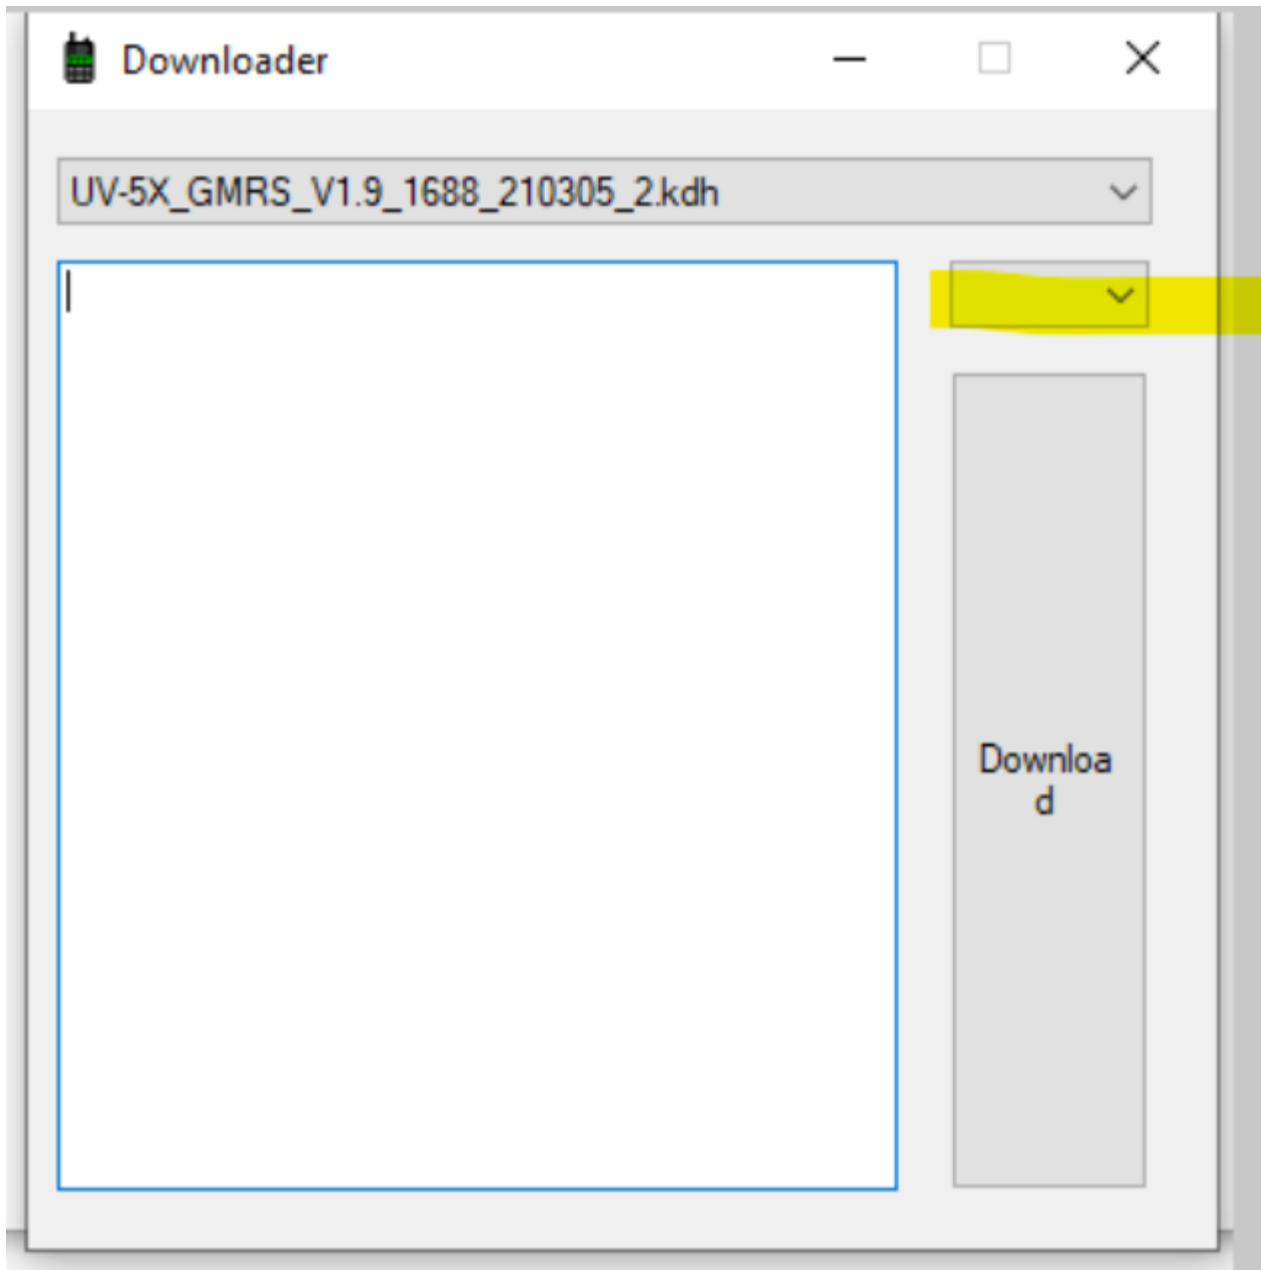

Open Device Manager to determine com port number and select it using the highlighted field in the Downloader App

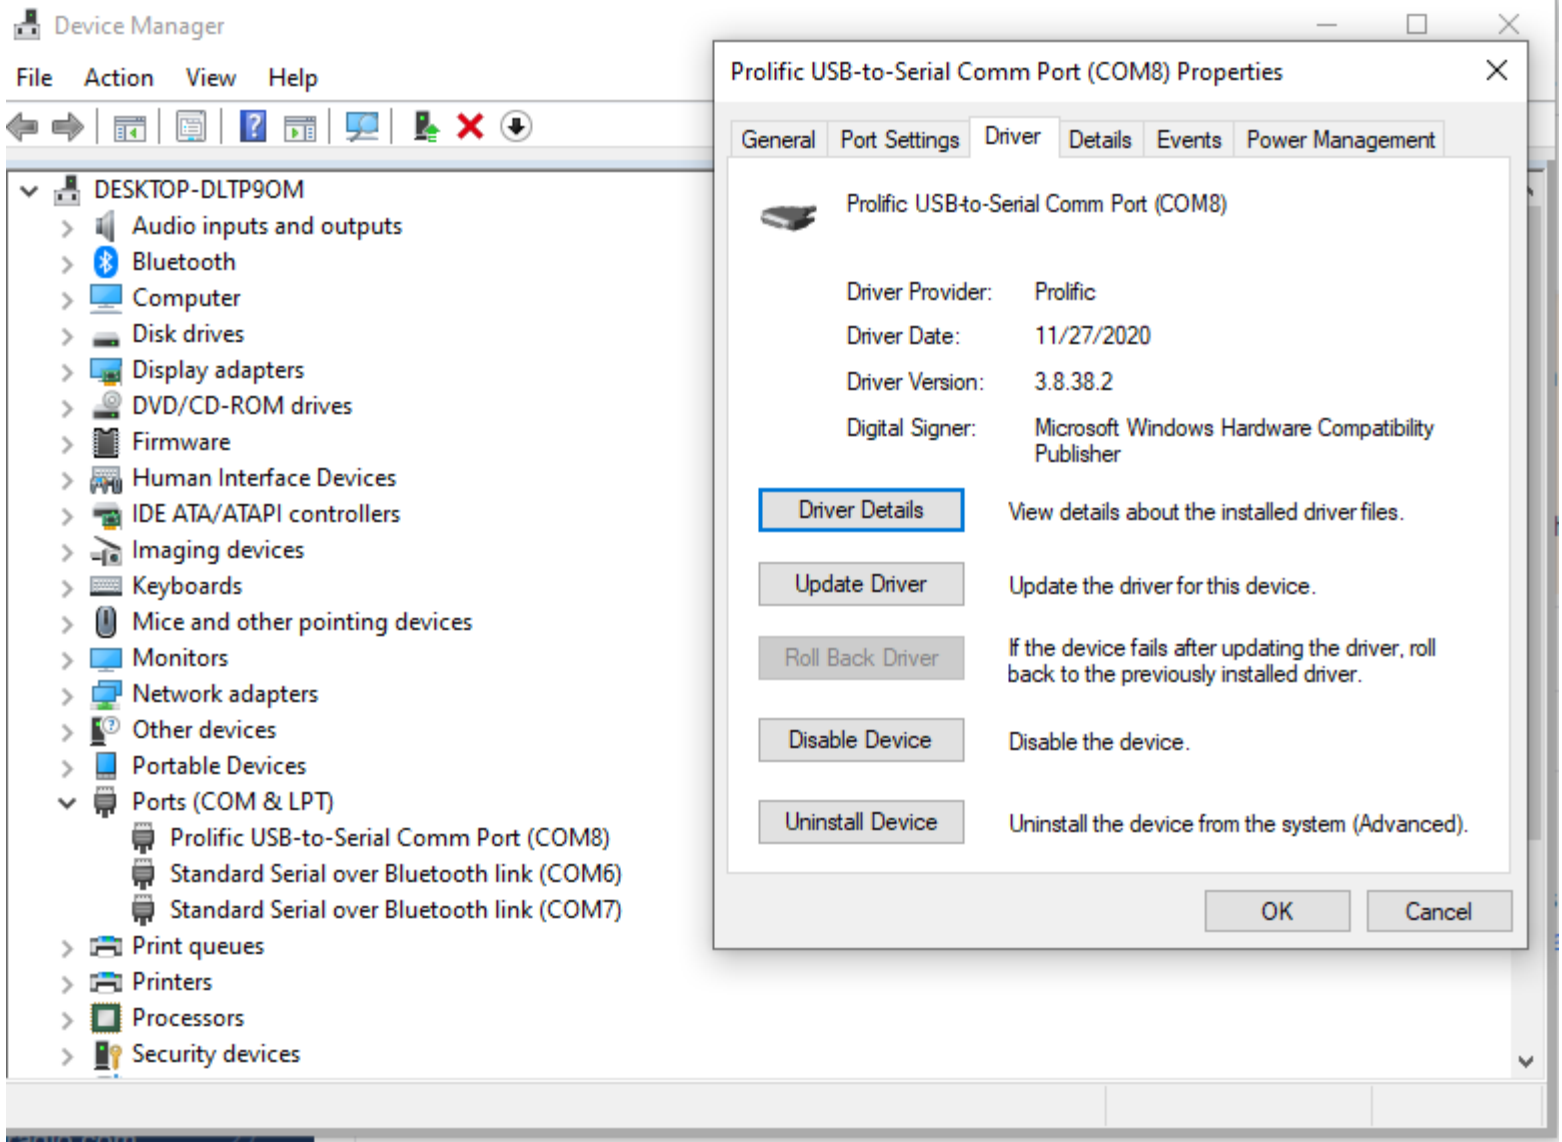

1. Plug the programming cable into the computer and radio.
2. Press and hold the MONI + CALL key, then turn the radio on. The screen should show a wide block in the middle
3. Click Download in the Downloader app, and wait for 100%.
4. Turn the radio off, remove the programming cable
5. Turn the radio back on and select Menu Option 40 and follow through to Reset the radio.

The CTCSS/DCS Tones should now be cleared and the Bandwidth corrected